
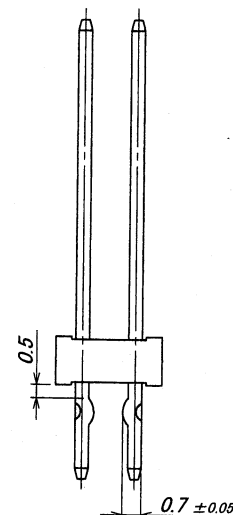


極数	部品番号	A	B	キंक位置/KINK POSITION (キंक有り/FORMING-△▽、無し/WITHOUT KINK=○)
CKT	PARTS No.			
20	9210B-2-20ZA331-PT1	18.0	19.9	X○○○○○○○○○○X
40	9210B-2-40ZA331-PT1	38.0	39.9	X○○○○○○○○○○X

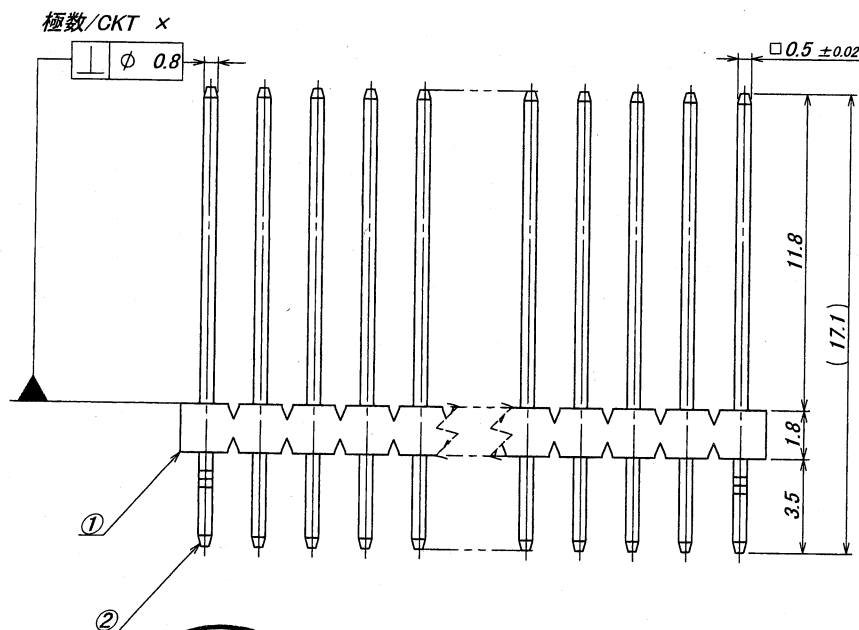

仕様

1. 最大定格電圧電流 : 250 V, 3A (AC, DC)
2. 使用温度範囲 : -40~+105℃
3. キンク (※) : 向きは対向、位置は上表参照。
4. 推奨基板 : 板厚 t=1.2~1.6mm
穴径 $\phi 0.85^{+0.1}_{-0}$

NOTE

1. MAXIMUM RATING VOLTAGE AND CURRENT : 250V, 3A (AC, DC)
 2. TEMPERATURE RANGE : -40~+105°C
 3. FORMING : OPPOSITE KINK DIRECTION.
 SEE THE ABOVE TABLE.
 4. RECOMMENDED HOLE SIZE AND THICKNESS OF P.C.B :
 $\phi 0.85^{+0.1}_{-0}$ 1. 2~1.6mm THICK

ISSUED

10.7.27

IRISO
ENG. DEPT

ISSUED 10.7.27 IRISO ENG. DEPT.				MATERIAL 材質 ①ベース: ガラス入りPA46, UL94V-0, 自然色(アイボリー), BASE: GLASS FILLED PA46, UL94V-0 COLOR: NATURAL (IVORY) ②端子/PIN: 黄銅/BRASS		GENERAL TOLERANCES 一般公差 DIM 寸法 ± 0.3 ANGLE 角度 ±		SCALE 尺度 / DR 10-7-26 Y. Nakagawa CHK 10-7-26 G. Nakahashi		UNIT 単位 mm DSN 05-5-16 Hori APP 70		TITLE 名称 9210シリーズ ピンヘッダー SERIES 9210 PIN HEADER	
FINISH 仕上げ 前めつき/PRE-PLATE (ニッケル下地めつき/OVER NICKEL PLATE: 1.0μmMIN. 錫リフローめつき/Sn REFLOW PLATE: 2.0μmMIN.				3RD. ANG. PROJ. 三角法 		IRISO ELECTRONICS CO., LTD イリソ電子工業株式会社		EDP No		PARTS No 部番 9210B-2-**ZA331-PT1		DWG No 図番 IMSA-9210B-2-**ZA331-PT1	
37618 RELEASED 7.7 4.1 10-7-26 ECN No REVISION RECORD 事 DR CHK DATE 年月日				DO NOT SCALE DRAWING.								REV. 0	

DO NOT SCALE DRAWING.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

木図面は、イ(1)番工丁表(柱)の両方ある棟切を合算したのでも半分の数でしかなく、

DECLINED CODE